

PH3225



FEATURES 特点

* Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

* DC / DC 转换器

MEASURING FREQUENCY 测试频率

* 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

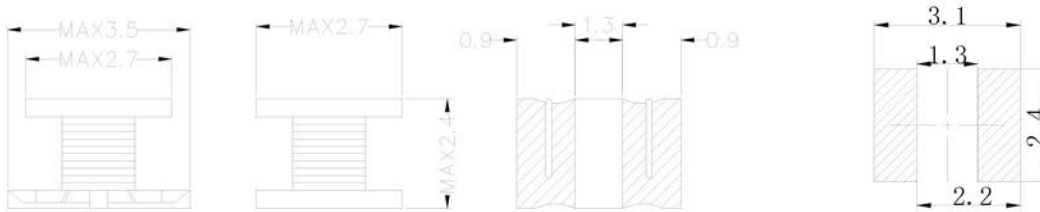

Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻 (mΩ)	Rated Current(Max) 額定電流 (A)
PH3225-1R0	1R0	1.0μH±20%	0.50	0.445
PH3225-1R2	1R2	1.2μH±20%	0.60	0.425
PH3225-1R5	1R5	1.5μH±20%	0.60	0.400
PH3225-1R8	1R8	1.8μH±20%	0.70	0.390
PH3225-2R2	2R2	2.2μH±20%	0.80	0.370
PH3225-2R7	2R7	2.7μH±20%	0.90	0.320
PH3225-3R3	3R3	3.3μH±20%	1.0	0.300
PH3225-3R9	3R9	3.9μH±20%	1.1	0.290
PH3225-4R7	4R7	4.7μH±20%	1.2	0.270
PH3225-5R6	5R6	5.6μH±20%	1.3	0.250
PH3225-6R8	6R8	6.8μH±20%	1.5	0.240
PH3225-8R2	8R2	8.2μH±20%	1.6	0.225
PH3225-100	100	10μH±20%	1.8	0.190
PH3225-120	120	12μH±20%	2.0	0.180
PH3225-150	150	15μH±20%	2.2	0.170
PH3225-180	180	18μH±20%	2.5	0.165
PH3225-220	220	22μH±20%	2.8	0.150
PH3225-270	270	27μH±20%	3.1	0.125
PH3225-330	330	33μH±20%	3.5	0.115
PH3225-390	390	39μH±20%	3.9	0.110
PH3225-470	470	47μH±20%	4.3	0.100
PH3225-560	560	56μH±20%	4.9	0.085
PH3225-680	680	68μH±20%	5.5	0.080
PH3225-820	820	82μH±20%	6.2	0.070
PH3225-101	101	100μH±20%	7.0	0.080
PH3225-121	121	120μH±20%	8.0	0.075
PH3225-151	151	150μH±20%	9.3	0.070
PH3225-181	181	180μH±20%	10.2	0.065
PH3225-221	221	220μH±20%	11.8	0.065
PH3225-271	271	270μH±20%	12.5	0.065
PH3225-331	331	330mH±20%	13	0.065
PH3225-391	391	390mH±20%	22	0.050
PH3225-471	471	470mH±20%	25	0.045
PH3225-561	561	560mH±20%	28	0.040

SPQ:2000PCS/REEL

* SPQ:3000PCS/REEL

The sample parameters are based on actual measured values