

PRH10D15



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

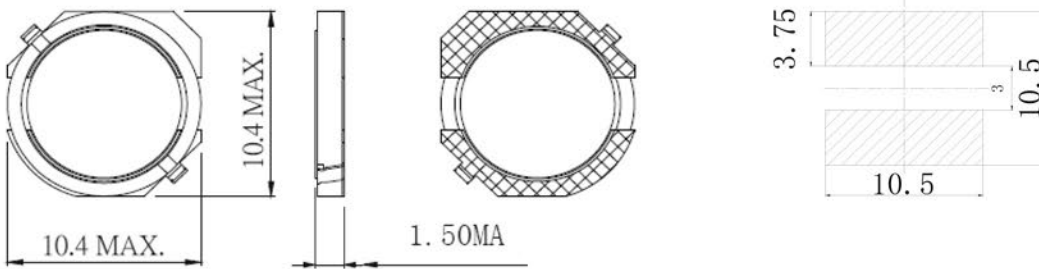

Electrical Characteristics 电气性能

Type 型号	Indicate 表示	Inductance 电感值	D.C.R(Max) 直流电阻 (mΩ)	Rated Current(Max) 额定电流 (A)
PRH10D 15-3R3	3R3	3.3	76(74.7m)	3.7
PRH10D 15-4R7	4R7	4.7	84(63.7m)	3.6
PRH10D 15-6R8	6R8	6.8	124(92.6m)	2.8
PRH10D 15-100	100	10	181(148.6m)	2.0
PRH10D 15-120	120	12	204(157.1m)	2.0
PRH10D 15-150	150	15	236(181.6m)	1.8
PRH10D 15-180	180	18	262(201.8m)	1.7
PRH10D 15-220	220	22	352(271.4m)	1.4
PRH10D 15-270	270	27	378(289m)	1.4
PRH10D 15-390	390	33	453(349.4m)	1.3
PRH10D 15-470	470	47	648(491.8m)	1.05

* SPQ:1000PCS/REEL