

PRH3D16



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

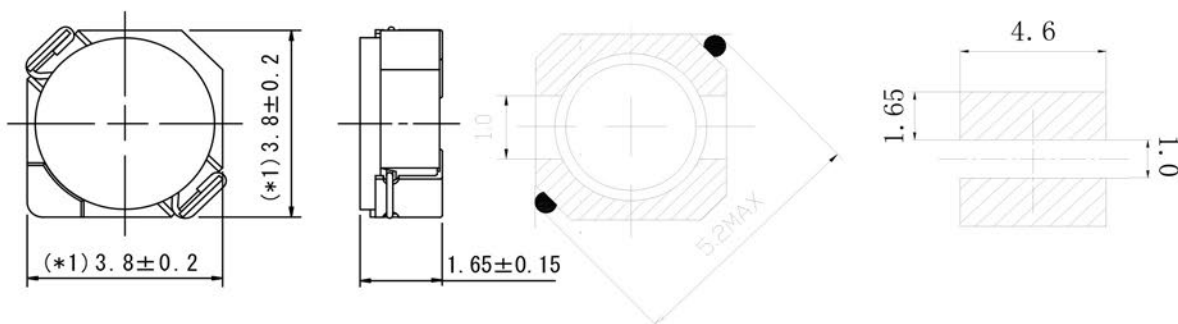

Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻 (毫歐)	Rated Current(Max) 額定電流 (A)
PRH3D1 6 -1R5	1R5	1.5 μ H \pm 30%	52(40)	1.55
PRH3D1 6 -2R2	2R2	2.2 μ H \pm 30%	72(55)	1.20
PRH3D1 6 -3R2	3R2	3.2 μ H \pm 30%	85(65)	1.10
PRH3D1 6 -4R7	4R7	4.7 μ H \pm 30%	105(80)	0.90
PRH3D1 6 -6R8	6R8	6.8 μ H \pm 30%	170(130)	0.73
PRH3D1 6 -100	100	10 μ H \pm 30%	210(160)	0.55
PRH3D1 6 -150	150	15 μ H \pm 30%	295(225)	0.45
PRH3D1 6 -220	220	22 μ H \pm 30%	430(330)	0.40
PRH3D16 -330	330	33 μ H \pm 30%	675(520)	0.32

* SPQ:3000PCS/REEL